



Contact our sales office for delivery dates and prices as this is a special model.

SP121X-006E  
P: QX

**SMC** P.G.Information (Specialized Product)

SMC CORPORATION  
4-14-1, SOTO-KANDA,  
CHIYODA-KU,  
TOKYO 101-0021, JAPAN  
URL: <http://www.smcworld.com>

## 5 Port Solenoid Valve / SZ3-60-X84

### ■Features:

#### A,B Port size One-touch fitting for $\phi 2$

- Easy piping to small size actuators








Model	A,B Port Size
SZ3□60-X84	One-touch fitting for $\phi 2$

### ■How to Order:

- SZ3□60-X84 (Plug in)

SZ3 1 60     - 5   LOZ     - C2 - X84

**Type of actuation**

1	2 position single solenoid 	A	4 position dual 3 port valve: N.C./N.C. 
2	2 position double solenoid 	B	4 position dual 3 port valve: N.O./N.O. 
3	3 position closed center 	C	4 position dual 3 port valve: N.C./N.O. 
4	3 position exhaust center 		
5	3 position pressure center 		

**Rated voltage**

5	24 VDC
6	12 VDC

**Back pressure check valve**

Nil	None
K	Built-in


- The built-in back pressure check valve type has an effective area approximately 20% smaller.
- The 3 position valve is not available with back pressure check valve.

**Pilot type**

Nil	Internal pilot
R	External pilot

- The 4 position dual 3 port valve is not available with external pilot specifications.

**Rated voltage**

Nil: Without switch  
  
 J: With switch  


**Common specifications**

Nil	Positive common
N	Negative common

**Manual override**

Nil: Non-locking push type 	D: Push-turn locking slotted type 
---	--

▪ SZ3 □ 60-X84 (Non Plug-in type)

SZ3 **1** 60 □ □ - **5** □ **M** □ □ - C2 - X84

**Type of actuation**

1	2 position single solenoid 	A	4 position dual 3 port valve: N.C./N.C. 
2	2 position double solenoid 	B	4 position dual 3 port valve: N.O./N.O. 
3	3 position closed center 	C	4 position dual 3 port valve: N.C./N.O. 
4	3 position exhaust center 		
5	3 position pressure center 		

**Pilot type**

Nil	Internal pilot
R	External pilot

• The 4 position dual 3 port valve is not available with external pilot specifications.

**Back pressure check valve**

Nil	None
K	Built-in

• The built-in back pressure check valve type has an effective area approximately 20% smaller.  
 • The 3 position valve is not available with back pressure check valve.

**Rated voltage**

5	24 VDC
6	12 VDC

**Common specifications**

Nil	Positive common
N	Negative common

**Manual override**

Nil: Non-locking push type  
  
 D: Push-turn locking slotted type

**Light/Surge voltage suppressor**

Nil	Without light/surge voltage suppressor
S	With surge voltage suppressor
Z	With light/surge voltage suppressor

**Electrical entry**

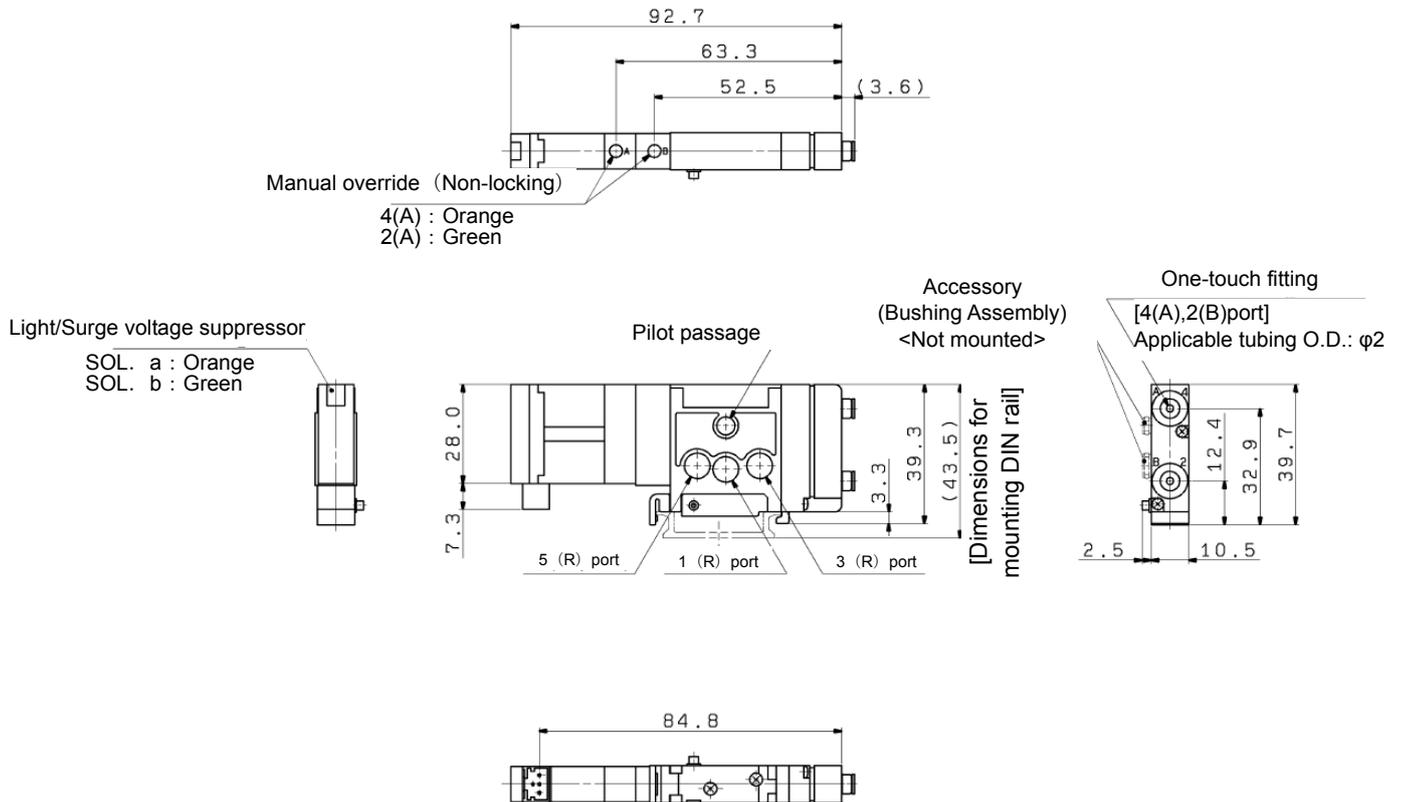
M: With lead wire (Length 300 mm)  
  
 MN: Without lead wire  
  
 MO: Without connector

## ■ Specifications:

The specifications other than the A, B port sizes are the same as the standard model. Please refer to the catalog or operation manual.

## ■ Dimensions: mm

### ▪ SZ3※60-X84



Note: The illustrations show the SZ3260-5LOZ-C2-X84 model. The dimensions other than the A, B port sizes are the same as the standard model.



**Caution** To ensure the safest possible operation of this product, please be sure to thoroughly read the "Safety Instructions" in our "Best Pneumatics" catalog before use.