Modular Type Air Combination

AC-D Series


Modular connection units are available through the Simple Specials System.


Please contact your local sales representative for more details.

Examples of Simple Specials

Combination example 1

Please contact your local sales representative for ordering procedures.




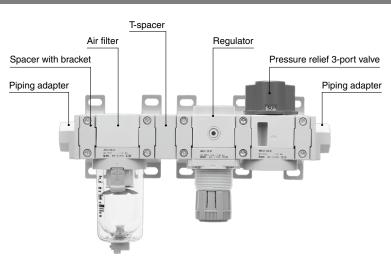

Combination example 2

* Please contact your local sales representative for ordering procedures.

Air filter 25A-AF30-03-D · · · · · · 1 pc.
Spacer with bracket 25A-Y300T-D ·······················2 pcs.
Mist separator 25A-AFM30-03-D · · · · · · · 1 pc.
Micro mist separator 25A-AFD30-03-D1 pc.

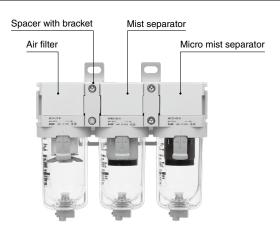




Air Filter 25A-AF20-D to 25A-AF60-D



How to Order



Series compatible with secondary batteries

- Semi-standard: Select one each for a and b.
- Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
 Example) 25A-AF30-N03B-RZ-D

	_						0		
			Symbol	Description			Body size	•	
					20	30	40	50	60
			Nil	Rc	•	•	•	•	•
2	F	Pipe thread type	N	NPT	•	•	•	•	•
			F	G	•	•	•	•	•
			+						
			01	1/8	•	_	_	_	_
	Port size	02	1/4		•	•	_	_	
8		03	3/8	_	•		_	_	
		04	1/2	_	_	•		_	
		06	3/4	_	_	•	•	—	
			10	1	_	_	_		
			+						
4	Option	Mounting	Nil	Without mounting option		•	•		•
	8	Woulding	B*1	With bracket		•			
			+						
	ard	a Flow direction	Nil	Flow direction: Left to right		•	•		•
	lg	a i low direction	R	Flow direction: Right to left					
6	Semi-standard		+						
	Ë	b Unit	Nil	Unit on product label: MPa, °C		•	•		
	Se	D OIII	Z *2	Unit on product label: psi, °F	O*2	O*2	O*2	○*2	O*2

^{*1} Option B is included in the package with the product but does not come assembled. The assembly consists of 2 types of brackets and 2 mounting screws.

Bracket, Bowl Assembly Part Nos. for the 25A- Series

Ontion	Model								
Option	25A-AF20-D	25A-AF30-D	25A-AF40-D	25A-AF40-06-D	25A-AF50-D	25A-AF60-D			
Bracket assembly*1	25A-AF24P-070AS	25A-AF34P-070AS	25A-AF44P-070AS	25A-AF49P-070AS	25A-AF54P-070AS				
Bowl assembly	owl assembly 25A-C2SF-D 25A-C3SF-D 25A-C4SF-D								

^{*1} The assembly consists of an A and B bracket and 2 mounting screws.




^{*2} O: For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Air Filter 25A-AF20-A to 25A-AF60-A



How to Order



Series compatible with secondary batteries

- Semi-standard: Select one each for a and b.
 Semi-standard symbol: When more than one
- specification is required, indicate in alphanumeric order. Example) 25A-AF30-N03B- \underline{RZ} -A

	_						0		
			Symbol	Description		[Body size	Э	
					20	30	40	50	60
			Nil	Rc	•	•	•	•	•
2	F	Pipe thread type	N	NPT	•	•	•	•	•
			F	G	•	•	•	•	•
			+						
			01	1/8		—	_	_	_
				1/4			•	_	_
3		Port size	03	3/8	_		•	_	_
v		i oit size		1/2		_		_	
				3/4	—	_	•		
				1	_	_	_		
			+						
	Option	Mounting	Nil	Without mounting option	•	•	•	•	
U	ဝိ	Wiodriting	B*1	With bracket					
			+						
	교	a Flow direction	Nil	Flow direction: Left to right		•	•	•	•
	lug	a i low direction	R	Flow direction: Right to left					
6	Semi-standard		+						
	<u> </u>	h Pressure unit	Nil	Name plate and caution plate for bowl in SI units: MPa		•	•	•	•
	S	b Pressure unit	Z *2	Name plate and caution plate for bowl in imperial units: psi, °F	O*2	O*2	O*2	○*2	○*2

st1 A bracket is not assembled and supplied loose at the time of shipment. Including 2 mounting screws.

Bracket, Bowl Assembly Part Nos. for the 25A- Series

Model Option	25A-AF20-A	25A-AF30-A	25A-AF40-A	25A-AF40-06-A	25A-AF50-A 25A-AF60-A			
Bracket assembly*1	25A-AF22P-050AS	25A-AF32P-050AS	25A-AF42P-050AS	25A-AF42P-070AS	25A-AF52P-050AS			
Bowl assembly	25A-C2SF-A	25A-C3SF-A	25A-C3SF-A 25A-C4SF-A					

st 1 The assembly consists of a bracket and 2 mounting screws.

* The 25A- series specifications and dimensions are the same as those of the standard model.




^{*2} O : For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Mist Separator 25A-AFM20-D to 25A-AFM40-06-D Micro Mist Separator 25A-AFD20-D to 25A-AFD40-06-D

- 25A-AFM Series Nominal filtration rating: 0.3 μm
- 25A-AFD Series Nominal filtration rating: 0.01 μm

How to Order



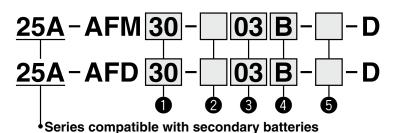

Semi-standard: Select one each for a and b.
 Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
 Example) 25A-AFM30-N03B-RZ-D

	_					0	
			Symbol	Description		Body size	
					20	30	40
			Nil	Rc	•	•	•
	Pipe thread type	N	NPT	•	•	•	
			F	G	•	•	•
			+				
			01	1/8	•	_	_
	Port size		02	1/4	•	•	•
			03	3/8	_	•	•
			04	1/2	_	_	•
			06	3/4	_	_	•
			+				·
Ontion	5	Mounting	Nil	Without mounting option	•	•	•
3	5	Mounting	B*1	With bracket	•	•	•
			+				
ro		Elow direction	Nil	Flow direction: Left to right	•	•	•
2	a	Flow direction	R	Flow direction: Right to left		•	•
Semi-ctandard	old		+				
3		Unit	Nil	Unit on product label: MPa, °C	•	•	•
ď	[b	Unit	Z *2	Unit on product label: psi, °F	O*2	O*2	O*2

^{*1} Option B is included in the package with the product but does not come assembled. The assembly consists of 2 types of brackets and 2 mounting screws.

Bracket, Bowl Assembly Part Nos. for the 25A- Series

	Model							
Option	25A-AFM20-D 25A-AFD20-D	25A-AFM30-D 25A-AFD30-D	25A-AFM40-D 25A-AFD40-D	25A-AFM40-06-D 25A-AFD40-06-D				
Bracket assembly*1	25A-AF24P-070AS	25A-AF34P-070AS	25A-AF44P-070AS	25A-AF49P-070AS				
Bowl assembly	25A-C2SF-D	25A-C3SF-D	25A-C4SF-D					

 $[\]ast 1\,$ The assembly consists of an A and B bracket and 2 mounting screws.

* The 25A- series specifications and dimensions are the same as those of the standard model.




^{*2} O: For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Mist Separator


25A-AFM20-A to 25A-AFM40-A Micro Mist Separator





25A-AFD Series Nominal filtration rating: 0.01 μm

How to Order

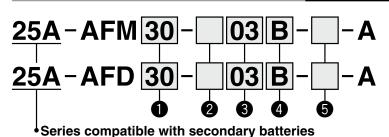

<sup>Semi-standard: Select one each for a and b.
Semi-standard symbol: When more than one</sup>

specification is required, indicate in alphanumeric order. Example) 25A-AFM30-N03B-RZ-A

		Symbol	Description		Body size	
		Symbol	Description	20	40	
				20	30	
		Nil	Rc	•	•	•
2	Pipe thread type	N	NPT	•	•	•
		F	G	•	•	•
		+				
		01	1/8	•	_	_
		02	1/4	•	•	•
3	Port size	03	3/8	_	•	•
		04	1/2	_	_	•
		06	3/4	_	_	•
		+				
	ы	Nil	Without mounting option	•	•	•
4	Mounting	B*1	With bracket	•	•	•
		+				
	ը	Nil	Flow direction: Left to right	•	•	•
	a Flow direction b Pressure unit	R	Flow direction: Right to left	•	•	•
6	star	+				
	· []	Nil	Name plate and caution plate for bowl in SI units: MPa	•	•	•
	ទី b Pressure unit	Z *2	Name plate and caution plate for bowl in imperial units: psi, °F	O*2	O*2	O*2

^{*1} A bracket is not assembled and supplied loose at the time of shipment. Including 2 mounting screws.

Bracket, Bowl Assembly Part Nos. for the 25A- Series

Model Option	25A-AFM20-A 25A-AFD20-A	25A-AFM30-A 25A-AFD30-A	25A-AFM40-A 25A-AFD40-A	25A-AFM40-06-A 25A-AFD40-06-A			
Bracket assembly*1	25A-AF22P-050AS	25A-AF32P-050AS	25A-AF42P-050AS	25A-AF42P-070AS			
Bowl assembly	25A-C2SF-A	25A-C3SF-A	25A-C4SF-A				

^{*1} The assembly consists of a bracket and 2 mounting screws.

* The 25A- series specifications and dimensions are the same as those of the standard model.



^{*2} O: For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Regulator


25A-AR20-D to 25A-AR60-D

Regulator with Backflow Function

25A-AR20K-D to 25A-AR60K-D



How to Order



- Series compatible with secondary batteries
- Semi-standard: Select one each for a to e.
- Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
 Example) 25A-AR30K-03B-1NR-D

	_							0		
				Symbol	Description			Body size		
						20	30	40	50	60
2			h backflow	Nil	Without backflow function		•	•	•	
G		1	function	K *1	With backflow function					
				+						
_				Nil	Rc					
3	F	Pipe	thread type	N	NPT					
				F	G					
				+						
				01	1/8		_	_	_	_
				02	1/4				_	_
A			Port size	03	3/8	_			_	_
U			-OIL SIZE	04	1/2	_	_		_	_
				06	3/4	_	_	•		
				10	1	_		_		
				+						
	Option &			Nil	Without mounting option			•	•	•
6	흲	[Mounting		B *3	With bracket					
	ဝီ		Н	With set nut (For panel fitting)				_	_	
				+						
			C-t	Nil	0.05 to 0.85 MPa setting					•
		а	Set pressure	1*4	0.02 to 0.2 MPa setting		•	•	•	•
				+	· · · · · · · · · · · · · · · · · · ·					
			Exhaust	Nil	Relieving type		•		•	•
	힏	b	mechanism	N	Non-relieving type		•	•	•	•
	dal			+						
	a		-	NII	Flow direction: Left to right					
6	-st	С	Flow direction	R	Flow direction: Right to left			•	•	Ŏ
	Ē			+	<u> </u>					
	Semi-standard		17. 1	Nil	Downward			•		
		d Knob		Y	Upward			•		
				+	- t					
				Nil	Unit on product label: MPa, Pressure gauge in SI units: MPa					
		е	Unit	Z *5	Unit on product label: psi, Pressure gauge: MPa/psi dual scale	O*5	O*5	O*5	O*5	O*5
		-		_	The production of the policy o					

- *1 Set the inlet pressure to at least 0.05 MPa higher than the set pressure.
- *2 Options B and H are not assembled and supplied loose at the time of shipment.
- *3 The assembly consists of a bracket and set nuts.
- *4 Pressure can be set higher than the specification pressure in some cases, but use pressure within the specification range.
- *5 O: For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Bracket, Set Nut Part Nos. for the 25A- Series

	Ontion	Model									
	Option	25A-AR20(K)-D	25A-AR30(K)-D	25A-AR40(K)-D	25A-AR40(K)-06-D	25A-AR50(K)-D	25A-AR60(K)-D				
	Bracket assembly*1	25A-AR23P-270AS	25A-AR33P-270AS	25A-AR40	3P-270AS	25A-AR54	P-270AS				
	Set nut	AR23P-260S	AR33P-260S	AR43F	P-260S		*2				

^{*1} The assembly consists of a bracket and set nuts. For the 25A-AR50(K)-D and 25A-AR60(K)-D, the assembly consists of an A and B bracket and 2 mounting screws.

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.



^{*2} Please contact SMC regarding the set nuts for the 25A-AR50(K)-D and 25A-AR60(K)-D.

Regulator


25A-AR20-B to 25A-AR60-B

Regulator with Backflow Function

25A-AR20K-B to 25A-AR60K-B



How to Order



- Series compatible with secondary batteries
- Semi-standard: Select one each for a to e.
- Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
 Example) 25A-AR30K-03B-1NR-B

	_	_									
				Symbol	Description			Body	size		
						20	25	30	40	50	60
<u> </u>		Wit	h backflow	Nil	Without backflow function				•	•	
4		1	function	K	With backflow function		•	•	•	•	
				+							
				Nil	Rc		•		•	•	
(3)	F	Pipe	thread type	N	NPT						
				F	G						
	With backflow function Pipe thread type Port size	+									
				01	1/8	•	_	_	_	_	
				02	1/4		•	•	•	_	
4			Port siza	03	3/8		•		•	_	_
•		1 011 3126		04	1/2		_	_	•		
				06	3/4		_	_	•		_
				10	1		_				
		_		+							
	*1			Nil	Without mounting option		•				
6	[읉	Mounting	B *2	With bracket		•		•			
	ŏ	<u>o</u>		Н	With set nut (For panel fitting)					_	
				+							
			Set pressure	Nil	0.05 to 0.85 MPa setting						
		a	Set pressure	1 *3	0.02 to 0.2 MPa setting						
				+							
		h	Exhaust	Nil	Relieving type						
	2		mechanism	N	Non-relieving type						
	g			+							
	lan		Flow direction	Nil	Flow direction: Left to right		•	•	•	•	
U	<u> </u>	C	riow direction	R	Flow direction: Right to left			•	•		
	E			+	-						
	S	d	Knob	Nil	Downward		•	•	•	•	
		u	KIIOD	Υ	Upward			•		•	
				+							
			Dunna !*	Nil	Name plate in SI units: MPa	•	•	•	•	•	
		е	Pressure unit	Z *4	Name plate in imperial units: psi	O*4	O*4	O*4	O*4	O*4	O*4

- *1 Options B and H are not assembled and supplied loose at the time of shipment.
- *2 The assembly consists of a bracket and set nuts (25A-AR20(K) to 25A-AR40(K)). Including 2 mounting screws for the 25A-AR50(K) and 25A-AR60(K).
- *3 Pressure can be set higher than the specification pressure in some cases, but use pressure within the specification range.
- *4 O: For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Bracket, Set Nut Part Nos. for the 25A- Series

Model Option	25A-AR20(K)-B	25A-AR25(K)-B	25A-AR30(K)-B	25A-AR40(K)-B	25A-AR50(K)-B 25A-AR60(K)-B
Bracket assembly*1	25A-AR23P-270AS	25A-AR28P-270AS	25A-AR33P-270AS	25A-AR43P-270AS	25A-AR52P-270AS*2
Set nut	AR23P-260S	AR28P-260S	AR33P-260S	AR43P-260S	*3

- *1 The assembly consists of a bracket and set nuts.
- *2 The assembly consists of a bracket and 2 mounting screws.
- *3 Please contact SMC regarding the set nuts for the 25A-AR50(K) and 25A-AR60(K).
 - * The 25A- series specifications and dimensions are the same as those of the standard model.



Filter Regulator


25A-AW20-D to 25A-AW60-D

Filter Regulator with Backflow Function

25A-AW20K-D to 25A-AW60K-D



How to Order



- Semi-standard: Select one each for a to d.
- · Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
- Example) 25A-AW30K-03B-1N-D

		Mounting B *3 With	Description		Body	size		
					20	30	40	60
2 Wi	ith ha	ockflow function		Without backflow function	•	•	•	•
Z VV	IIII De	icknow function	K *1	With backflow function	•	•	•	
				Rc		•	•	•
3	Pipe	thread type		NPT		•	•	•
				G	•		•	
				1/2				1
				1/8	•	 -	_	
	Port size			1/4	<u> </u>	•	•	
4				3/8		•	•	_
		OIT SIZE		1/2	_		•	_
			06	3/4		_	•	
			10	1		_	_	
10	. —						_	
*2				Without mounting option	•	•	•	
Option 6		Mounting		With bracket	•	•	•	•
Įσ			Н	With set nut (For panel fitting)	•		•	_
	. —		+					
	a	Set pressure	Nil	0.05 to 0.85 MPa setting	•	•	•	•
	a	Set pressure	1*4	0.02 to 0.2 MPa setting	•		•	
			+				•	
arc	b	Exhaust	Nil	Relieving type	•	•	•	•
9 Semi-standard		mechanism	N	Non-relieving type	•		•	
			+					
<u> </u>		Flow direction	Nil	Flow direction: Left to right	•	•	•	
Sel	c Flow direction		R	Flow direction: Right to left	•	•	•	•
			+					
	d	Unit	Nil	Unit on product label: MPa, °C, Pressure gauge in SI units: MPa	•	•	•	•
	l u	Offic	Z *5	Unit on product label: psi, °F, Pressure gauge: MPa/psi dual scale	○*5	○*5	○*5	○*5

- *1 Set the inlet pressure to at least 0.05 MPa higher than the set pressure.
- *2 Options B and H are not assembled and supplied loose at the time of shipment.
- *3 The assembly consists of a bracket and set nuts
- *4 Pressure can be set higher than the specification pressure in some cases, but use pressure within the specification range.
- *5 O: For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Bracket, Set Nut, Bowl Assembly Part Nos. for the 25A- Series

Statical Country Country I are troop for the 2011 Control								
Ontion			Model					
Option	25A-AW20(K)-D	25A-AW30(K)-D	25A-AW40(K)-D	25A-AW40(K)-06-D	25A-AW60(K)-D			
Bracket assembly*1	25A-AW23P-270AS	25A-AR33P-270AS	25A-AR4	3P-270AS	25A-AR54P-270AS			
Set nut	AR23P-260S	AR33P-260S	AR43F	P-260S	<u>_*2</u>			
Bowl assembly	25A-C2SF-D	25A-C3SF-D		25A-C4SF-D				



The assembly consists of a bracket and set nuts. For the 25A-AW60(K)-D, the assembly consists of an A and B bracket and 2 mounting screws. Please contact SMC regarding the set nuts for the 25A-AW60(K)-D.

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Filter Regulator


25A-AW20-B to 25A-AW60-B

Filter Regulator with Backflow Function

25A-AW20K-B to 25A-AW60K-B



How to Order



Series compatible with secondary batteries

- Semi-standard: Select one each for a to d.
- · Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.

Example) 25A-AW30K-03B-1N-B

	_	_										
				Symbol	Description		Body	size				
						20	30	40	60			
2	\	م ما مان	ackflow function	Nil	Without backflow function		•	•	•			
4	VVII	אלו וו.	acknow function	K	With backflow function	•	•	•	•			
				+								
				Nil	Rc		•	•	•			
8	F	Pipe	thread type	N	NPT	•	•	•	•			
			F	G	•	•	•					
				+								
				01	1/8	•	_	_	_			
		Port size		02	1/4	•	•	•	_			
4				03	3/8	_	•	•				
•				04	1/2	_	_	•				
				06	3/4	_	_	•	•			
				10	1	_	_	_				
				+	· · · · · · · · · · · · · · · · · · ·		1	1				
	*1			Nil	Without mounting option	<u> </u>	•	•				
6	Option		Mounting	B *2	With bracket	•	•	•	•			
	Õ			Н	With set nut (For panel fitting)	•			_			
				+				1				
		а	Set pressure	Nil	0.05 to 0.85 MPa setting	<u> </u>	•	•				
			Cot procedio	1*3	0.02 to 0.2 MPa setting	•						
	_			+				1				
	arc	b	Exhaust	Nil	Relieving type	•	•	•	•			
	Semi-standard		mechanism	N	Non-relieving type	<u> </u>	•	•				
6	-Ste			+				r				
	Ē	c Flow direction		Nil	Flow direction: Left to right	•	•	•	•			
	Se			R	Flow direction: Right to left	•						
				+				1				
		d	Pressure unit	Nil	Name plate and caution plate for bowl in SI units: MPa	•	•	•				
		a	u	a	a	i ressure unit	Z *4	Name plate and caution plate for bowl in imperial units: psi, °F	○*4	O*4	O*4	○*4

- *1 Options B and H are not assembled and supplied loose at the time of shipment.
- *2 The assembly consists of a bracket and set nuts (25A-AW20(K) to 25A-AW40(K)). Including 2 mounting screws for the 25A-AW60(K).
- *3 Pressure can be set higher than the specification pressure in some cases, but use pressure within the specification range.
- *4 : For pipe thread type: NPT. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Bracket, Set Nut, Bowl Assembly Part Nos. for the 25A- Series

Model Option	25A-AW20(K)-B	25A-AW30(K)-B	25A-AW40(K)-B	25A-AW60(K)-B
Bracket assembly*1	25A-AW23P-270AS	25A-AR33P-270AS	25A-AR43P-270AS	25A-AW62P-270AS*2
Set nut	AR23P-260S	AR33P-260S	AR43P-260S	*3
Bowl assembly	25A-C2SF-A	25A-C3SF-A	25A-C	4SF-A

The assembly consists of a bracket and set nuts.

^{*2} The assembly consists of a bracket and 2 mounting screws. *3 Please contact SMC regarding the set nuts for the 25A-AW60(K).

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Mist Separator Regulator


25A-AWM30, AWM40-D Micro Mist Separator Regulator 25A-AWD30, AWD40-D

- 25A-AWM Series Nominal filtration rating: 0.3 μm
- 25A-AWD Series Nominal filtration rating: 0.01 μm

How to Order



25A-AWD30-D

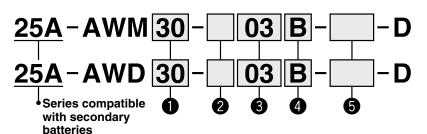

Semi-standard: Select one each for a to d.
 Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
 Example) 25A-AWM30-F03B-1NR-D

25A-AWM30-D

	_								
			Symbol Description		Description	Body	size		
						30	40		
				Nil	Rc	•	•		
2	F	Pipe	thread type	N	NPT	•	•		
				F	G	•	•		
				+					
				02	1/4	•	•		
3		F	Port size	03	3/8	•	•		
				04	1/2	_	•		
				+					
	*1			Nil	Without mounting option	•	•		
4	Option		Mounting	B *2	With bracket	•	•		
	ŏ			Н	With set nut (for panel mount)	•	•		
				+					
		a	Set pressure*3	Nil	0.05 to 0.85 MPa setting	•	•		
		a	Set pressure	1	0.05 to 0.2 MPa setting	•	•		
				+					
	힏	b	Exhaust	Nil	Relieving type	•	•		
	nda		mechanism	N	Non-relieving type	•	•		
6	Semi-standard			+					
	emi	С	Flow direction	Nil	Flow direction: Left to right	•	•		
	Š		I low direction	R	Flow direction: Right to left	•	•		
				+					
		4	Unit	Nil	Unit on product label: MPa, °C	•	•		
		d	d	d	Offit	Z *4	Unit on product label: psi, °F	○*5	○*5

^{*1} Options B and H are not assembled and supplied loose at the time of shipment.

Bracket, Set Nut, Bowl Assembly Part Nos. for the 25A- Series

	,			
	Model			
Optional specifications	25A-AWM30-D	25A-AWM40-D		
	25A-AWD30-D	25A-AWD40-D		
Bracket assembly*1	25A-AR33P-270AS	25A-AR43P-270AS		
Set nut	AR33P-260S	AR43P-260S		
Bowl assembly	25A-C3SF-D	25A-C4SF-D		

^{*1} The assembly consists of a bracket and set nuts.



^{*2} The assembly consists of a bracket and set nuts.

^{*3} Pressure can be set higher than the specification pressure in some cases, but use pressure within the specification range.

^{*4} For the pipe thread type: NPT

This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

^{*5} O: For the pipe thread type: NPT only


^{*} The 25A- series specifications and dimensions are the same as those of the standard model.

Soft Start-up Valve **25A-AV2000-A** to **25A-AV5000-A**





How to Order





Series compatible with secondary batteries*7

- Select one each for options "a" and semi-standard options "b" and "c."
 Option/Semi-standard symbol: When more than one specification is required, indicate in alphabetical order.
- Example) 25A-AV2000-N02B-1DB-RZ-A

k		compliant:	
	CL/UNCA	CUITIDIIAITI.	•

		Electrical entry	
	Grommet	DIN terminal	M12 connector
AC	_	•	_
DC	•	•	•

							(
			_	Symbol	Description		Body	size	
						20	30	40	50
				Nil	Rc	•	•	•	•
2	Th	read ty	me	N	NPT			•	
9		roud ty	po	F	G			•	
	J			+					
				02	1/4			_	
				03	3/8		•	_	_
8		ort siz		04	1/2		_	•	
•	10	(P), 2(<i>i</i>	4)	06	3/4		_		•
				10	1		_	_	
	J			+	·				
	8			Nil	Without mounting option	•	•	•	
4	a a	Mou	unting	В	With bracket		•	•	
				+					
				1	100 VAC			•	
		AC		2	200 VAC	•	•	•	•
			(50/60 Hz)	3	110 VAC [115 VAC]*1		•	•	•
6	Rated coil vo	oil voltage ` ´	4	220 VAC [230 VAC]*1		•	•		
				5	24 VDC	•	•	•	•
			DC	6	12 VDC	•	•	•	•
				+					
				G	Grommet (Lead wire length: 300 mm)	•	•	•	
				D	Type D (DIN terminal/With connector)	•	•	•	•
6	Elec	trical e	entry	Y	Type Y (DIN terminal/With connector)*2	•	•	•	•
				КО	M12 connector (Without cable)	O*3	O*3	O*3	O*3
				+					
				Nil	None	•	•	•	•
O	Light/surge	voltage	suppressor	Z	With light/surge voltage suppressor	O*4	O*4	O*4	O*4
	J			+	j sa grandja sa ja ja sa j				
				Nil	Non-locking push type	•	•	•	•
8	Manı	ual ove	erride	В	Push-turn locking slotted type	•	•	•	•
				C	Push-turn locking lever type	•	•	•	•
				+	· · · · · · · · · · · · · · · · · · ·		, -		
	힏.			Nil	Flow direction: Left to right	•	•	•	
	dar b	Flow	direction	R	Flow direction: Right to left	•	•	•	•
9	star			+					
	Semi-standard d	_		Nil	Unit on product label: MPa, Pressure gauge: MPa	•	•	•	•
	S C	Press	ure unit	Z *5	Unit on product label: psi, Pressure gauge: MPa/psi dual scale	O*6	O*6	O*6	O*6
					T 000 VAO				

- *1 The 110 VAC and the 115 VAC are interchangeable. The 220 VAC and the 230 VAC are interchangeable as well. The allowable voltage fluctuation is –15% to +5% of the rated voltage for the 115 VAC or the 230 VAC.
- *2 Type "Y" is a DIN terminal in compliance with EN-175301-803C (former DIN43650C).
- *3 When the electrical entry is "KO," only the DC specifications (5 or 6) can be selected for the rated coil voltage.
- *4 When it is "KO," only the "With light/surge voltage suppressor" option can be selected.
- *5 For the pipe thread type: NPT
- This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)
- *6 Pressure unit Z: For the pipe thread type: NPT only
- *7 Coils for pilot valve assemblies, connector pins, and lead wires are made of copper.

^{*} The 25A- series specifications and dimensions are the same as those of the standard model.




Bracket/Option Part Nos., Pilot Valve Assembly/Replacement Parts for the 25A- Series

Deceriation	Series					
Description	25A-AV2000-A	25A-AV3000-A	25A-AV4000-A	25A-AV5000-A		
Bracket assembly*1	25A-AV22P-210AS	25A-AV32P-210AS	25A-AV42P-210AS	25A-AV52P-210AS		
Pilot valve assembly		Refer to the How	to Order below.			

^{*1} Bracket: 1 pc., Mounting screw: 2 pcs. (3 pcs. for the 25A-AV5000-A)

How to Order Pilot Valve Assembly



Series compatible with secondary batteries

			Cumbal	Description		Applicable	body size	
			Symbol	Description	20	30	40	50
•	Dod	:	2	For the AV2000-A, AV3000-A	•	•	_	_
0	Body	size	4	For the AV4000-A, AV5000-A	_	_	•	•
			+					
			1	100 VAC	•	•	•	•
		AC	2	200 VAC	•	•	•	•
2	Rated coil	(50/60 Hz)	3	110 VAC [115 VAC]*1	•	•	•	•
•	voltage		4	220 VAC [230 VAC]*1	•	•	•	•
		DC	5	24 VDC	•	•	•	•
		DC	6	12 VDC	•	•	•	•
			+					
			G	Grommet (Lead wire length: 300 mm)	•	•	•	•
3	Floatria	al antm	D	Type D (DIN terminal/With connector)	•	•	•	•
•	Electric	al entry	Υ	Type Y (DIN terminal/With connector)*2	•	•	•	•
			КО	M12 connector (Without cable)	○*3	○*3	○*3	○*3
			+					
4	Light/ourgo volt	aga alipprocess	Nil	None	•	•	•	•
•	Light/Surge voil	age suppressor	Z	With light/surge voltage suppressor	○*4	○*4	○*4	O*4
			+					
			Nil	Non-locking push type	•	•	•	•
6	Manual	override	В	Push-turn locking slotted type	•	•	•	•
			С	Push-turn locking lever type	•	•	•	•


^{*1} The 110 VAC and the 115 VAC are interchangeable. The 220 VAC and the 230 VAC are interchangeable as well. The allowable voltage fluctuation is -15% to +5% of the rated voltage for the 115 VAC or the 230 VAC.

^{*2} Type "Y" is a DIN terminal in compliance with EN-175301-803C (former DIN43650C).

^{*3} When the electrical entry is "KO," only the DC specifications (5 or 6) can be selected for the rated coil voltage. *4 When it is "KO," only the "With light/surge voltage suppressor" option can be selected.

Precision Regulator 25A-IR1000/2000/3000-A Series

How to Order





- Option/Semi-standard: Select one each for a, b, and c.
- Option/Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.

	Sym					Body size		
				Symbol	Description			
				,	<u>'</u>	1	2	3
				0	0.005 to 0.2 MPa	•	•	_
	Set pressure range			0	0.01 to 0.2 MPa		_	•
2				1	0.01 to 0.4 MPa	•	•	•
					0.01 to 0.8 MPa	•	•	•
				+			•	
	0			0	Bottom exhaust	•	•	•
8		Exhaust direction		1	Front exhaust		_	•
				2	Rear exhaust		_	•
	•			+		<u> </u>		
					Rc	•	•	•
4	Pipe thread type			N	NPT	•	•	•
				F	G	•	•	•
				+			•	
		01			1/8	•	_	_
A	D			02	1/4		•	•
6		Port size			3/8		_	•
					1/2		_	•
				+				
		а	Mounting	Nil	Without mounting option	•	•	•
	*1			B *2	With bracket	•	•	•
				Н	With hexagon panel nut (for panel mount)	•	•	•
		+					,	
6	Option	b	With digital pressure switch	EA	NPN open collector 1 output	•	•	•
	ŏ			EB	PNP open collector 1 output	•	•	•
				EC	NPN open collector 2 outputs + Analog voltage output	•	•	•
				ED	NPN open collector 2 outputs + Analog current output	•	•	•
				+				
	Semi-standard	С	Flow direction	Nil	Flow direction: Left to right	•	•	•
				R	Flow direction: Right to left	•	•	•
				+	-			
		d	Knob	Nil	Upward	•	•	•
7				V	Downward		•	•
				+				
		е	Pressure unit*3	Nil	Name plate and pressure gauge in imperial units: MPa	•	•	•
				Z	Name plate and pressure gauge in imperial units: psi	•	•	•
				ZA	Digital pressure switch: With unit conversion function	•	•	•

- *1 Options are shipped together with the product but do not come assembled. B and H cannot be selected at the same time. The current bracket cannot be used for this product.
- *2 The assembly consists of a bracket and set nuts
- *3 See pressure unit table below.

To dee pressure unit table below.										
	Pipe thread	Name plate in	Pressure switch in imperial units	Sales*6						
	type	imperial units	EA, EB, EC, ED							
	Rc		Fixed SI unit	Japan,						
Nil	NPT	MPa		Overseas						
	G									
	Rc	_	_							
Z *4	NPT	psi	With unit conversion function (Initial value psi)	Only overseas						
	G	_	_							
	Rc			Only overseas						
ZA *5	NPT	MPa	With unit conversion function							
	G									

- *4 For pipe thread type: NPT
- *5 For options: EA, EB, EC, ED
- *6 According to the new Measurement Law, only the SI unit type is provided for use in Japan.
 - * The 25A- series specifications and dimensions are the same as those of the standard model.


re the same as those of the standard model.





Electro-Pneumatic Regulator 25A-ITV1000/2000/3000 Series



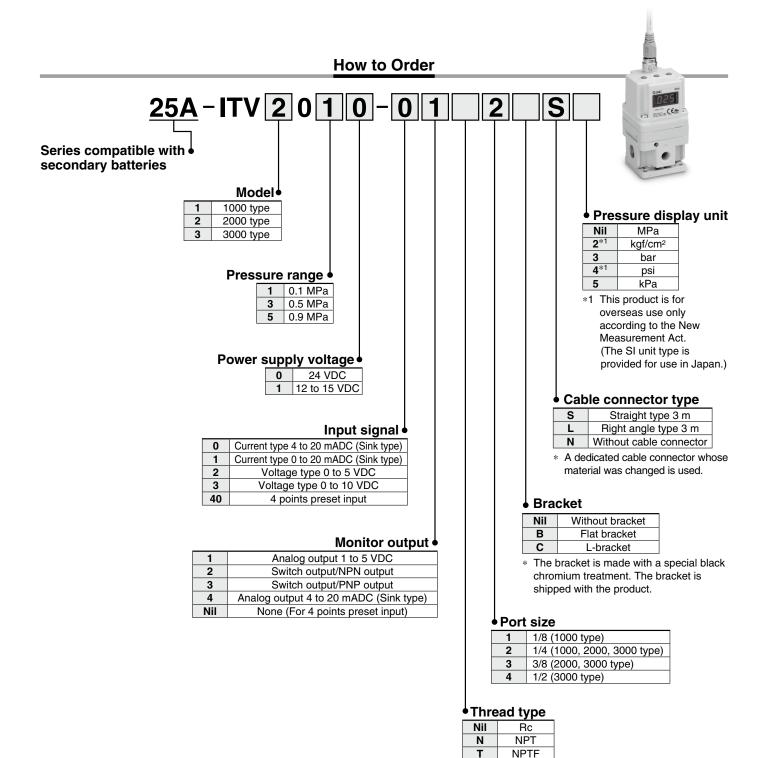

- * Since the lead wires and electrical circuits are used, this product is not completely copper-free. Only the wetted parts are copper-free.
- * Copper and zinc materials are used for solenoid valve coils, connector pins, and lead wire substrate.
- * The 25A- series specifications and dimensions are the same as those of the standard model.

For details, refer to the Web Catalog.




F

G

Electronic Vacuum Regulator



25A-ITV209 Series

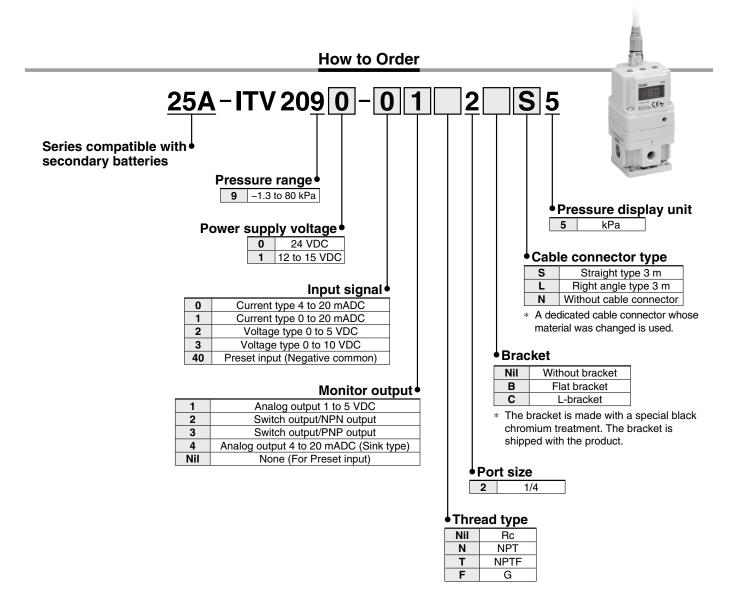

- * Since the lead wires and electrical circuits are used, this product is not completely copper-free. Only the wetted parts are copper-free.
- Copper and zinc materials are used for solenoid valve coils, connector pins, and lead wire substrate.
- The 25A- series specifications and dimensions are the same as those of the standard model.

