

# **Miniature Regulator**


# ARJ310 Series




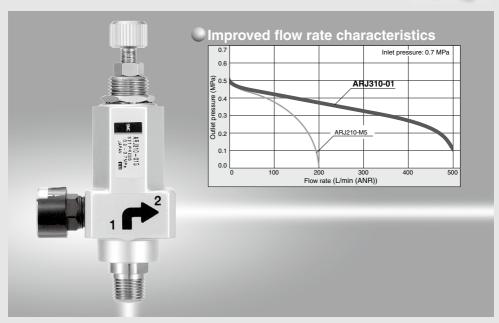

# Compact and lightweight Allows smaller mounting pitch (Main body 65 g)







# **Miniature Regulator** ARJ310 Series

## Standard Specifications





# Symbol

Pressure gauge port size	Rc 1/8, NPT 1/8 (Female thread)
Fluid	Air
Proof pressure	1.2 MPa
Maximum operating pressure	0.8 MPa
Regulating pressure range	Standard: 0.2 to 0.7 MPa, Low pressure use (0.2 MPa setting): 0.05 to 0.2 MPa
Ambient and operating temperature range	-5 to 60°C (No freezing)
Construction	Relieving type
Weight (kg)	0.065

#### Model

Model	Port size		
	IN *	OUT	
ARJ310-01	R1/8, M5 x 0.8	Rc 1/8	
ARJ310-N01	NPT1/8, M5 x 0.8	NPT 1/8	
ARJ310F-01-04	D4/0.145 0.0	ø4 One-touch fitting	
ARJ310F-01-06	R1/8, M5 x 0.8	ø6 One-touch fitting	
ARJ310F-N01-03		ø5/32" One-touch fitting	
ARJ310F-N01-07	NPT1/8, M5 x 0.8	ø1/4" One-touch fitting	


<sup>\*</sup> M5 x 0.8 female thread is cut inside the pipe.

#### Accessory (Option) Part No.

Bracket	134856	
Pressure gauge Note)	G15-10-01(Rc1/8)/G15-P10-N01(NPT1/8)	


Note) Pressure gauges (G15) for 0.2 MPa are not available.


#### How to Order

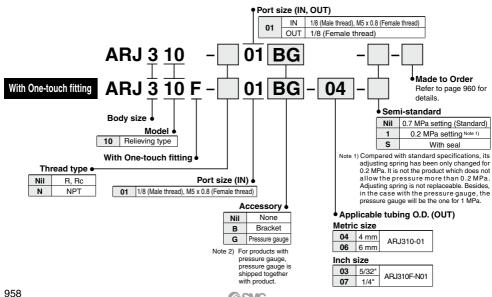


## Flow Rate Characteristics (Representative Values)


Inlet pressure: 0.7 MPa








### **Pressure Characteristics (Representative Values)**




Conditions: Inlet pressure 0.7 MPa Outlet pressure 0.2 MPa Flow rate Q = 20 L/min (ANR)

#### Construction

#### ARJ310-01

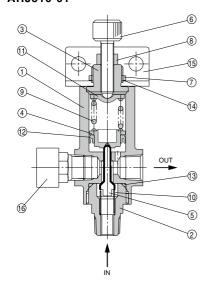

#### ARJ310F-01




#### Component Parts


No.	Description	Material	Note	
_ 1	Body	Aluminum alloy		
2	Valve guide			el plated
3	Bonnet			
4	Piston	POM		
5	Valve	Brass	Rubber lining mate	rial: HNBR
6	Adjusting screw	w Iron Nickel plated		
7	Panel nut	Iron	Zinc chrom	ated
8	Hexagon nut	Iron	Zinc chromated	
9	Adjusting spring	Steel wire	Zinc chrom	ated
10	Valve spring	Stainless steel		
11	Spring holder	Steel band	Zinc chrom	ated
12	2 Mini Y-seal NBR			
13	O-ring	NBR		
14	Lock washer	SS	Zinc chromated	
15	Bracket	Steel band	Electrophoretic painting	Accessory
16	Pressure gauge	_		Accessory
17	Cassette	POM, Stainless steel		

## **ARJ310** Series

#### **Dimensions**

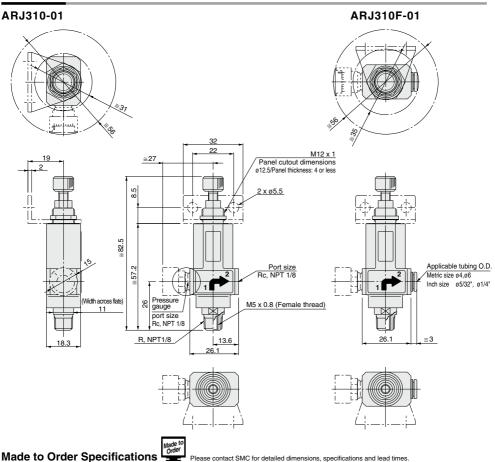

For moderate pressure (0.4 MPa Setting): Compared with standard specifications, its adjusting spring has been only changed for 0.4 MPa. It is not the product which does not allow the pressure more than 0.4 MPa. Adjusting spring is not replaceable.

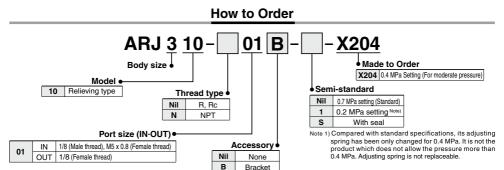

**SMC** 



# ARJ310 Series Specific Product Precautions

Be sure to read this before handling the products.

Refer to page 9 for safety instructions and pages 13 to 17 for precautions on every series.

#### **Design and Selection**

# 

- This product cannot be used as a check regulator by installing it between solenoid valve and actuator. It can result in causing breakdown and malfunction.
- 2. When piping, tighten the regulator with the recommended proper tightening torque shown in the table below while holding the wrench flats (width 11) of the valve guide for IN port and holding the hexagonal section of the body for the OUT port. Excessive tightening or holding a part other than those specified can cause damage.
- While piping to products or operating the knob, ensure that an excess bending moment should not be applied to a product, because it may result in damage.

#### Recommended proper torque

Connection thread	Recommended proper torque [N·m]	Note
M5	1.0 to 1.5	The recommended torque when using a tightening tool to tighten an additional 1/6 to 1/4 turn after tightening by hand
R1/8	7 to 9	_

## 

When operating at an inlet pressure lower than the inlet pressure used in the flow rate characteristics graph, the pressure drop on the outlet side may be greater. Therefore, be sure to conduct testing using the actual equipment.

For pressure control equipment selection, refer to the "Product Selection Guide."

#### Mounting

## 

#### To set the correct pressure

 Make connections after confirming the mark which indicates the air inlet. Reversed connections can cause malfunction.

